

MULTILAYER CERAMIC ELECTRONIC COMPONENT MANUFACTURING METHOD

Publication number: WO03036667 (A1)

Publication date: 2003-05-01

Inventor(s): NAGAI ATSUO [JP]; OTSUKI JUN [JP]; KURAMITSU
HIDEKI [JP]; KOBAYASHI KEIJI [JP]

Applicant(s): MATSUSHITA ELECTRIC IND CO LTD [JP]; NAGAI ATSUO
[JP]; OTSUKI JUN [JP]; KURAMITSU HIDEKI [JP];
KOBAYASHI KEIJI [JP]

Classification:


- international: *H01G4/30*; H01G4/30; (IPC1-7): H01G4/12


- European: H01G4/30


Application number: WO2002JP10926 20021022


Priority number(s): JP20010327344 20011025; JP20010327345 20011025

Also published as:

 US2004070903 (A1)


 US2004070903 (A1)


 US7014725 (B2)

 US7014725 (B2)

 TW583695 (B)


Cited documents:

 JP63260122 (A)

 JP3236210 (A)

Abstract of WO 03036667 (A1)

A method comprises a first step of fabricating a multilayer body by stacking alternately ceramic sheets and internal electrodes with adhesive layers interposed therebetween and a second step of baking the multilayer body. The adhesive layers contain a thermoplastic resin and one or more kinds out of Cr, Mg, Al, Si, their compounds, and an inorganic powder constituting the ceramic sheets. By such a method, the adhesion between the baked ceramic layers and the internal electrodes is improved, and structural defects such as delamination and cracks are suppressed.

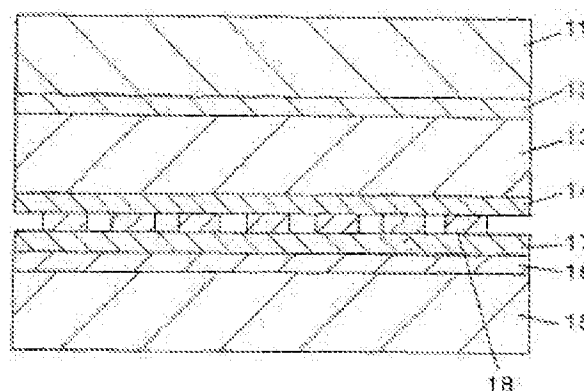

Data supplied from the *esp@cenet* database — Worldwide